


# LIS Developers' Guide

July 7, 2014

Version 1.0

History:

Revision	Summary of Changes	Date
1.0	LIS 7.0 Public release	July 7, 2014



**National Aeronautics and Space Administration**  
**Goddard Space Flight Center**  
Greenbelt, Maryland 20771

## Contents

<b>1</b>	<b>Introduction</b>	<b>3</b>
<b>2</b>	<b>Background</b>	<b>4</b>
2.1	LIS . . . . .	4
<b>3</b>	<b>Coding and Documentation Conventions</b>	<b>6</b>
3.1	Coding conventions . . . . .	6
3.2	Documentation conventions . . . . .	7
<b>4</b>	<b>Customizable Features in LIS</b>	<b>11</b>
4.1	What is polymorphism? . . . . .	11
4.2	Polymorphism in LIS . . . . .	12
<b>5</b>	<b>Generic data structures in LIS</b>	<b>15</b>
<b>6</b>	<b>File I/O Support in LIS</b>	<b>17</b>
6.1	Adding Log Messages to the Diagnostic Output File . . . . .	17
6.2	Managing Fortran Unit Numbers . . . . .	17
<b>7</b>	<b>How to add a new land surface model in LIS</b>	<b>19</b>
7.1	How to add an additional output variable in LIS . . . . .	21
<b>8</b>	<b>How to add a new forcing scheme in LIS</b>	<b>23</b>
8.1	How to add an additional forcing variable in LIS . . . . .	24
<b>9</b>	<b>How to add a new domain</b>	<b>27</b>
<b>10</b>	<b>How to add a new parameters</b>	<b>27</b>
<b>11</b>	<b>How to add a new irrigation scheme</b>	<b>27</b>
<b>12</b>	<b>How to add a new routing scheme</b>	<b>27</b>
<b>13</b>	<b>Customizing LIS for data assimilation</b>	<b>28</b>
<b>14</b>	<b>“Use only what you need”</b>	<b>32</b>
14.1	Defining source directories for compilation . . . . .	32
14.2	Defining components while building the executable . . . . .	35

# 1 Introduction

This document describes some of the interoperable features in LIS and how to use/extend them. The following sections describe the general development and documentation practices recommended for using and extending LIS software, followed by the guidelines for using the extensible features in LIS for customization and improved functionality.

DRAFT

## 2 Background

This section provides some general information about the LIS project and land surface modeling.

### 2.1 LIS

Land surface models provide characterizations of the water and energy exchanges and biogeochemical processes of the soil-vegetation-snowpack medium. A realistic representation of these processes is critical for improving the understanding of the boundary layer and land-atmosphere interactions. The development of LIS has been motivated by the need to develop an infrastructure that combines the use of land surface simulation, available observations and the required computing tools for accurate land surface prediction. As discussed in [6], LIS integrates and extends the capabilities of Land Data Assimilation Systems (LDASs) such as the 25km Global Land Data Assimilation System (GLDAS) and the 12.5km North American Land Data Assimilation System (NLDAS). LIS is primarily an infrastructure for operating an ensemble of land surface models with capabilities for data integration and assimilation, over user-specified regional or global domains. The new phase in LIS development is to extend its capabilities by linking with other earth system components, enabling coupled systems that can model land-atmosphere interactions more effectively.

LIS is designed using advanced software engineering principles, and features a highly modular, flexible, object oriented, component-based framework. Figure 1 shows the software architecture of LIS. The core of the system consists of structures to manage generic utilities such as time, configuration, geospatial transformations, I/O, parallel computing constructs, logging, etc. These structures provide generic, model-independent support for high performance computing, resource management, data and I/O handling, and other functions. The LIS core controls the overall program execution and manages the inclusion of user-defined extensible components through several related abstractions. These abstractions, shown in the middle layer, include generic representations of land surface models, data assimilation schemes, meteorological forcing schemes, domains, running modes etc. The specific user defined components extend these abstractions. For example, Figure 1 shows a number of land surface models (Noah, CLM, HySSIB, Catchment) implemented in LIS through the land surface model abstraction. By providing a structure that allows the reuse and community sharing of modeling tools, LIS allows rapid prototyping and development of new applications. These interoperable features in LIS has enabled the incorporation of a growing suite of community LSMs, meteorological forcing analyses, different sources of land surface parameters, and data assimilation schemes. The system also allows for the plug and play of various user-defined components and has enabled several intercomparison studies involving land surface models, parameters, and assimilation schemes.

Please refer to [6, 5, 7] for details on the design of LIS. This document provides instructions on the use of the “plug-and-play” features or abstractions

in LIS.

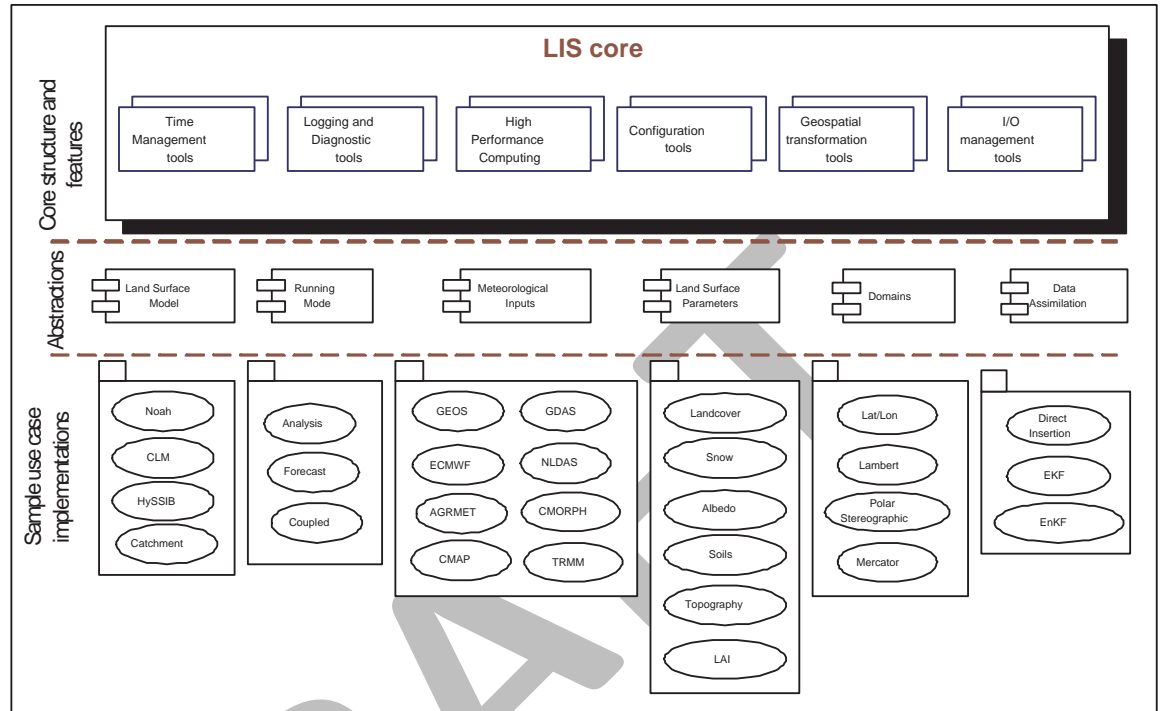


Figure 1: Software architecture of the LIS framework

## 3 Coding and Documentation Conventions

This section describes some of the coding and documentation conventions [1] that are helpful for developers of LIS.

### 3.1 Coding conventions

LIS is implemented using the Fortran 90 and C programming languages. Since different Fortran compilers parse source files differently depending on the file extension (such as .f, .f77, .F, .f90, and .F90) the task of porting code to different platforms is a difficult process. Therefore, Fortran additions and contributions to LIS code are expected to be written using the Fortran 90, and the sources files must have an F90 extension. Some of the style guidelines followed in LIS are as follows:

- Preprocessor: C preprocessor (cpp) is used wherever the use of a language preprocessor is required. The Fortran compiler is assumed to have the ability to run the preprocessor as part of the compilation process. The preprocessing tokens are written in uppercase to distinguish them from the Fortran code.
- Loops: All loops in Fortran are structured using do-endsdo constructs as opposed to numbered loops.
- Modules: Modules must be named the same as the file in which they reside. This is enforced due to the fact that make programs build dependencies based on file names.
- Implicit none: All variables in different modules should be explicitly typed, and this should be enforced by the use of the “implicit none” statement.
- Standards: For consistency, for readability, and for use with other tools. LIS code must follow these coding standards. Note that code integrated into LIS from other sources, say University of Washington’s VIC land surface model, should not be rewritten to conform with these coding standards.
  - Line length: Lines shall be not exceed 80 characters in length. Lines longer than 80 characters must be broken with a newline (i.e.; press Enter) as opposed to soft line wrapping.
  - Indentation: Code blocks (e.g.; subroutines, if blocks, do loops) are expected to be indented for readability. Indentation shall be 3 spaces per level – no Tab characters.
  - Documentation: All subroutines/functions shall be documented within the code, referred to as the in-line documentation. See Section 3.2 for specific instructions.

### 3.2 Documentation conventions

LIS uses an in-line documentation system that allows users to create both web-browsable (html) and print-friendly(ps/pdf) documentation. Each function, subroutine, or module includes a prologue instrumented for use with the ProTex auto-documentation script [2]. The following examples describe the documentation templates used in LIS.

Review templates and add examples.

DRAFT

Templates for routines that are not internal to modules.

```
!BOP
!  
! !ROUTINE:  
!  
! !INTERFACE:  
!  
! !USES:  
!  
! !INPUT PARAMETERS:  
!  
! !OUTPUT PARAMETERS:  
!  
! !DESCRIPTION:  
!  
! !BUGS:  
!  
! !SEE ALSO:  
!  
! !SYSTEM ROUTINES:  
!  
! !FILES USED:  
!  
! !REVISION HISTORY:  
!  
!   27Jun02  Username Initial specification  
!  
!EOP
```

---



Template for a module :

```
!BOP
!  
! !MODULE:  
!  
! !PUBLIC TYPES:  
!  
! !PUBLIC MEMBER FUNCTIONS:  
!  
! !PUBLIC DATA MEMBERS:  
!  
! !DESCRIPTION:  
!  
! !REVISION HISTORY:  
!  
!   27Jun02  Username Initial specification  
!  
!EOP
```

Template for a C file:

```
//BOP
//
// !ROUTINE:
//
// !INTERFACE:
//
// !USES:
//
// !INPUT PARAMETERS:
//
// !OUTPUT PARAMETERS:
//
// !DESCRIPTION:
//
// !BUGS:
//
// !SEE ALSO:
//
// !SYSTEM ROUTINES:
//
// !FILES USED:
//
// !REVISION HISTORY:
//
// 27Jun02 Username Initial specification
//
//EOP
//-----
```

## 4 Customizable Features in LIS

The LIS core is designed with extensible interfaces for facilitating easy incorporation of new features into LIS. The LIS core uses advanced features of the Fortran 90 programming language, which are especially suitable for object oriented programming. The object oriented style of design adopted in LIS enables the core to provide well defined interfaces or “plug points” for enabling rapid prototyping and development of new features and applications into LIS.

The LIS core includes a number of abstractions including:

- surface model: Interfaces for adding new land and water (such as lake) surface models.
- meteorological forcing: Interfaces for adding new model forcing schemes.
- data assimilation: Interfaces for specifying assimilation of observational data using data assimilation algorithms.

The actual implementation of a component uses these abstractions following the concept of polymorphism.

### 4.1 What is polymorphism?

The modules in LIS are constructed using a component-based design, with each module/component designed to abstract the behavior of a certain program segment. The interfaces are designed to emulate the concept of polymorphism from the object oriented software design world. As the definition of the word implies, polymorphism is the state of being able to assume different forms. A polymorphic method is typically defined with minimal and common functionality, and specific implementations of the methods override the polymorphic method. Figure 2 shows an example of polymorphic behaviour in the real world. A *car* class is a polymorphic module, and *sports car* and *van* are specific instances of the abstract, *car* class. The *car* class might contain a *move* method, which could be overwritten with a different behaviour in the *sports car* and *van* classes. In object oriented programming, the *move* method is always invoked on the polymorphic class (*car*), and depending on the specific instance used in the simulation, the *move* call will be delegated to the *move* call of the *sports car* or the *move* call of the *van* class.

Unfortunately, true polymorphism and the automatic delegation of the polymorphic methods to the specific instances are true object oriented features. Since Fortran 90 is not an object oriented language, polymorphism can only be simulated only in software. This is achieved by the use of virtual function tables. The virtual function tables maintain a list of specific instances of each polymorphic method. Since Fortran is not an object oriented language, the task of adding the functions or “registering” the functions into the virtual function tables needs to be performed to simulate polymorphism. The C language allows the capability to store functions, table them, and pass them as arguments. The

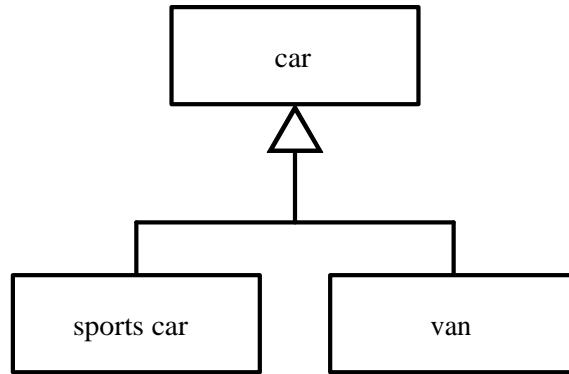


Figure 2: Example of polymorphic behaviour

Fortran 90 programming language allows passing of functions as arguments. By combining these features of both languages, LIS uses a complete set of operations with function pointers.

## 4.2 Polymorphism in LIS

Polymorphism is simulated in LIS using virtual function tables and the actual delegation of the calls are done at run-time by resolving the function names from the table. Figure 3 illustrates how the function tables work. A function is stored in the table typically by a **register** function, that simply stores the pointer to the function at the specified index. The *call register(1,f1)* stores the function *f1* into the function table with an index of 1 and the call *call register(2,f2)* stores the function *f2* into the function table with with an index of 2. When the function needs to be accessed, a generic call is made which resolves into a specific call depending on the index specified. In this case, the *call retrieve(1)* invokes the method *f1* from the table and the call *call retrieve(2)* invokes the method *f2*. This implementation helps in defining generic calls in programs. In the following, “registry” is used to refer to a function table.

In the LIS architecture, the customizable features listed in section 4 are implemented using the virtual function tables. For each customizable feature, abstract interfaces are provided by LIS, with the specific implementations and the addition to the corresponding registry left to the user. Once the functions are implemented and added to the registry, the appropriate delegation and linkages of the calls are handled by the LIS core software. Further, when a new feature is implemented in LIS, the user does not necessarily have to be familiar with the implementation details of the rest of the software. This feature enables rapid prototyping and testing of new applications into LIS.

The LIS 7.0 source code contains a number of sub directories, which are organized as components. The top-level organization of the source (*src*) is listed

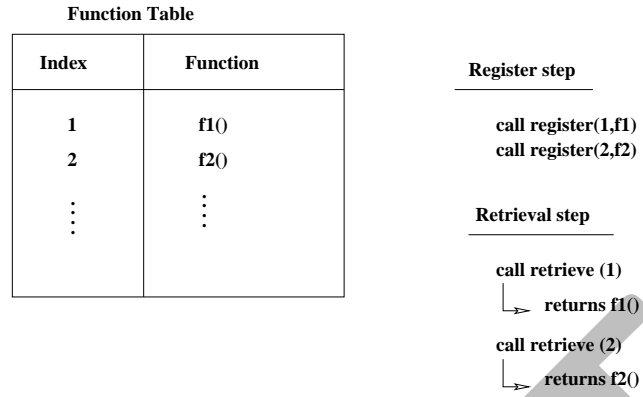


Figure 3: Example of a function table implementation

in Table 1. (See LIS' User's Guide for a comprehensive description of LIS' source organization.) The *plugins* directory contains modules where the registries for each polymorphic method are defined.

Directory Name	Synopsis
<i>apps</i>	Directory containing various applications that use LIS
<i>arch</i>	Directory containing the configurable options for building the LIS executable
<i>configs</i>	some sample LIS configuration files
<i>core</i>	core routines in LIS
<i>dataassim</i>	Top level directory for data assimilation support
<i>domains</i>	Directory containing the domains of various map projections / custom grids
<i>interp</i>	Generic spatial and temporal interpolation routines
<i>irrigation</i>	Top level directory for irrigation support
<i>lib</i>	External libraries supplied with the LIS source code
<i>make</i>	Makefile and needed header files for building LIS executable
<i>metforcing</i>	Top level directory for meteorological forcing methods
<i>offline</i>	Contains the main program for the offline mode of operation
<i>optUE</i>	Top level directory for optimization support
<i>params</i>	Directory containing implementations of various land surface model parameters
<i>plugins</i>	Modules defining the function table registry of extensible functionalities
<i>routing</i>	Directory containing various routing schemes
<i>rtms</i>	Directory containing coupling routines to various radiative transfer models
<i>runmodes</i>	Directory containing the various running modes in LIS
<i>surfmodels</i>	Directory containing implementations of various surface models (land, lake, openwater)
<i>suppforcing</i>	Directory containing the various supplemental forcing implementations
<i>testcases</i>	Testcases for verifying various functionalities
<i>utils</i>	Miscellaneous helpful utilities

Table 1: Top-level directory structure of LIS source code

## 5 Generic data structures in LIS

In LIS, the land surface model executions are defined on a fundamental unit called ‘tile’. Each of these tiles can be mapped to a grid point on the modeling domain. LIS also supports nesting or concurrent execution on multiple domains. Each of these nests consists of a number of model tiles. The following are the key LIS variables that are related to the model execution space:

<code>LIS_rc%ntiles(n)</code>	Number of tiles, for each processor, for the nest <code>n</code>
<code>LIS_rc%glbntiles(n)</code>	Number of tiles for the whole domain, for the nest <code>n</code>
<code>LIS_rc%npatch(n,m)</code>	Number of tiles, for each processor, for the nest <code>n</code> and for the surface model type <code>m</code>
<code>LIS_rc%glbnpatch(n,m)</code>	Number of tiles for the whole domain, for the nest <code>n</code> and for the surface model type <code>m</code>
<code>LIS_rc%ngrid(n)</code>	Number of grid points, for each processor, for the nest <code>n</code>
<code>LIS_rc%glbngrid(n)</code>	Number of grid points for the whole domain, for the nest <code>n</code>
<code>LIS_rc%lnc(n)</code>	Number of columns in the domain, for each processor, for the nest <code>n</code>
<code>LIS_rc%lnr(n)</code>	Number of rows in the domain, for each processor, for the nest <code>n</code>
<code>LIS_rc%gnc(n)</code>	Number of columns in the domain, for the whole domain, for the nest <code>n</code>
<code>LIS_rc%gnr(n)</code>	Number of rows in the domain, for the whole domain, for the nest <code>n</code>

Note that  $\sum_m \text{LIS\_rc}\%npatch(n,m) = \text{LIS\_rc}\%ntiles(n)$ . Also note that when a single processor is used, the `LIS_rc%ntiles(n)`, `LIS_rc%npatch(n,m)`, `LIS_rc%ngrid(n)`, `LIS_rc%lnc(n)`, and `LIS_rc%lnr(n)` will be exactly equal to `LIS_rc%glbntiles(n)`, `LIS_rc%glbnpatch(n,m)`, `LIS_rc%glbngrid(n)`, `LIS_rc%gnc(n)`, and `LIS_rc%gnr(n)`, respectively. Further, when no subgrid-tiling is used, the tile space and grid space are exactly equivalent (`LIS_rc%ntiles(n)` equals `LIS_rc%ngrid(n)`). These indices also represent the grid and tile space domain decomposition.

`LIS_domain(n)%gindex` defines the mapping between the grid location and the tile index.

```
tileindex = LIS_domain(n)%gindex(col,row)
```

where `col` and `row` are the column and row index of the grid point and `tileindex` defines the index of the tile.

The *src/core* directory contains a number of modules that provides variables that may be required while defining land surface model specific routines. Some of the useful modules and the variables provided by them are listed below. For more details, please refer to the source code documentation.

Module name	Provides
<i>LIS_timeMgrMod</i>	Variables and routines for time management
<i>LIS_coreMod</i>	<b>LIS_domain</b> : representations of lis domain including tiles, grids and 2D mappings <b>LIS_config</b> : overall runtime configuration <b>LIS_rc</b> : representation of overall simulation control
<i>LIS_domainMod</i>	Variables and routines that define domain decomposition
<i>LIS_constantsMod</i>	specification of global constants
<i>LIS_gribMod</i>	grib support implementations
<i>LIS_historyMod</i>	generic routines for parallel I/O



## 6 File I/O Support in LIS

LIS provides support for performing file input and output (i/o). This support is contained in the *core/LIS\_fileIOMod.F90* and the *core/LIS\_logMod.F90* files.

The *core/LIS\_fileIOMod.F90* contains support for reading 2D gridded data from a direct access binary file.

The *core/LIS\_logMod.F90* file contains support for writing into the diagnostic output file, typically named *lislog*, and for managing Fortran unit numbers.

Please consult these files when adding a new feature into LIS that requires file i/o.

Support for model output is provided by the *core/LIS\_historyMod.F90* and the *core/LIS\_histDataMod.F90* files.

### 6.1 Adding Log Messages to the Diagnostic Output File

The diagnostic output file, typically named *lislog*, contains status messages generated by LIS at run-time. To add such messages into the diagnostic output file, one must make the `LIS_logunit` variable available. E.g.,

```
use LIS_logMod, only : LIS_logunit
```

Then one simply writes to the `LIS_logunit`. E.g.,

```
write(LIS_logunit,*) 'My status message.'
```

LIS also provides support for filtering, at run-time, the status messages that are generated. The level of filtering is specified in the run-time configuration file, *lis.config*. It is referenced in the code through the `LIS_rc%plevel` variable. Please read the documentation contained in the *configs/lis.config* file. To use this filtering, one must make the `LIS_rc%plevel` variable available. E.g.,

```
use LIS_coreMod, only : LIS_rc
```

Then one places the status message in an if-block. E.g.,

```
if ( LIS_rc%plevel .ge. 2 ) then
  write(LIS_logunit,*) 'My debugging status message.'
endif
```

The higher the `plevel`, the more messages that are generated. Please use a greater-than-or-equal-to test to evaluate the `plevel`.

### 6.2 Managing Fortran Unit Numbers

Using hard-coded unit numbers in a Fortran open statement can be problematic, especially for a large program written by many different people. When Fortran processes an open statement, it will close any file already connected to the unit number, and it will then open the new file and connect the new file to the unit number. Thus, when using hard-coded unit numbers, it is possible for one part

of LIS to open a file and for a different part of LIS to inadvertently close that file while trying to open another one.

To avoid this problem, LIS maintains a list of available unit numbers, and LIS provides two methods for interacting with this list. The `LIS_getNextUnitNumber` function returns an available unit number. The `LIS_releaseUnitNumber` routine returns the given unit number to the pool of available numbers.

To use the unit number management routines, one must make the `LIS_getNextUnitNumber` and the `LIS_releaseUnitNumber` methods available. E.g.,

```
use LIS_logMod, only : LIS_getNextUnitNumber, LIS_releaseUnitNumber
```

Then one calls these methods as in this example.

```
ftn = LIS_getNextUnitNumber()
call LIS_readData(n,ftn,LIS_rc%topo_gridDesc(n,:),go)
call LIS_releaseUnitNumber(ftn)
```

## 7 How to add a new land surface model in LIS

The *plugins* directory contains the *LIS\_lsm\_pluginMod* module that can be used to customize and define land surface models in LIS. The *LIS\_lsm\_pluginMod* contains a *LIS\_lsm\_plugin* method that defines a number of registries to capture the basic offline operations of a land surface model. The registries can be used to define functions to perform the following tasks:

- initialization:  
Definition of land surface model variables, allocation of memory, reading run-time parameters, etc.
- setup:  
Initialization of land surface model parameters.
- dynamic setup:  
Routine to initialize or update time dependent parameters.
- run:  
Routine to execute land surface model for a single timestep.
- write restart:  
Routine to write restart files
- read restart:  
Routine to read restart files
- transfer of forcing data to model tiles:  
Routine that provides an array of forcing variables for each gridcell.
- Finalize:  
Routine that cleans up any allocated memory structures

A new LSM (lets say Noah) must implement each of the above 8 methods for successful incorporation in LIS.

The following example shows how the registry functions are defined for the Noah 3.3 LSM.

```
call registerlsminit(trim(LIS_noah33Id)//char(0),noah33_lsm_ini)
call registerlsmsetup(trim(LIS_noah33Id)//char(0),noah33_setup)
call registerlsmdynsetup(trim(LIS_noah33Id)//char(0),noah33_dynsetup)
call registerlsmsrun(trim(LIS_noah33Id)//char(0),noah33_main)
call registerlsmf2t(trim(LIS_noah33Id)//"+"&
                  //trim(LIS_retroId)//char(0),noah33_f2t)
call registerlsmrestart(trim(LIS_noah33Id)//char(0),noah33_readrst)
call registerlsmwrst(trim(LIS_noah33Id)//char(0),noah33_writerst)
call registerlsmfinalize(trim(LIS_noah33Id)//char(0),noah33_finalize)
```

The `LIS_noah33Id` refers to the string label assigned to Noah 3.3. The file *LIS\_pluginIndices.F90* defines the conventions used in LIS. Please note that these can be modified by the user if a different convention is to be followed.

The registry functions defined for noah are:

<code>noa33_lsm_ini</code>	Initialization for Noah
<code>noah33_setup</code>	Sets up Noah's parameters
<code>noah33_dynsetup</code>	Sets up Noah's time dependant parameters
<code>noah33_main</code>	Runs the Noah model on the model tiles for a single timestep
<code>noah33_readrst</code>	Reads the Noah restart files
<code>noah33_writrst</code>	Writes Noah's restart files
<code>noah33_f2t</code>	Transfers forcing data to Noah model tiles
<code>noah33_finalize</code>	Cleanups up allocated memory structures

The first step is to organize the LSM code so that the actual model physics can be isolated to the execution on a single model tile, for a single timestep. The subroutine `SFLX` in Noah represents such a routine. The call to the model physics should be defined in `noah33_main` as follows:

```
do t=1,LIS_rc%npatch(n,m)
  call SFLX ( <arguments> )
enddo
```

Since the model prognostic variables, input parameters, and diagnostic outputs need to be accessed for initialization, output, model restart and other functions, they are defined as module variables in `noah33_module`, which represents the variable definition for a single model tile. In the initialization routine (`noah33_lsm_ini`, the memory structures are allocated as shown below (similar to the LIS structure, memory for the nests are allocated and then memory for model tiles are allocated). Finally the `noah33_readcrd` call reads the run-time specifications that are specific to Noah LSM. These config options specify variables such as locations of land surface model specific parameter files, restart writing intervals, initial conditions, etc. The routine to read these variables is typically done during initialization of the land surface model.

```
allocate(noah33_struc(LIS_rc%nnest))
call noah33_readcrd()
do n=1,LIS_rc%nnest
  allocate(noah33_struc(n)%noah(LIS_rc%npatch(n,LIS_rc%lsm_index)))
enddo
```

The `noah33_setup` routine is used to define the land surface parameters used in Noah. These include parameters related to vegetation and soils. `noah33_dynsetup` performs a similar function, to setup parameters that are time-dependent. These include the use of monthly greenness and quarterly albedo climatologies.

`noah33_readrst` and `noah33_writrst` are restart reading and writing routines for Noah, respectively. These subroutines read and write the list of prognostic variables for Noah to a file, so that the model can be restarted from such

a file. The variables are written out in tilespace, using the generic routines specified in *LIS\_historyMod* file.

`noah33_f2t` is a routine that translates the input forcing to the actual Noah model tiles. The forcing variables processed by LIS are in tile space so that the translation is a 1-to-1 mapping.

Finally the `noah33_finalize` is a cleanup routine that cleanly deallocates the memory structures allocated specific to Noah.

This set of routines completes the incorporation of Noah LSM in LIS. A number of LSMs are implemented in LIS using this plugin style.

## 7.1 How to add an additional output variable in LIS

LIS provides support for writing many model output variables. The *configs/MODEL\_OUTPUT\_LIST.TBL* file lists all the output variables that LIS supports. When reviewing this list, please refer to the Assistance for Land Modeling Activities (ALMA; [3]) standard. The variables in the *MODEL\_OUTPUT\_LIST.TBL* file correspond quite obviously to those described by ALMA. When adding a new land surface model, please follow the ALMA convention when processing the model's output. Note that LIS does not yet support every variable listed by ALMA and that ALMA does not describe every variable of hydrological interest. Thus additional modifications to the LIS code may be necessary to complete the implementation of the new land surface model.

The *core/LIS\_historyMod.F90* file and the *core/LIS\_histDataMod.F90* file provide the support for writing model output. Let's consider adding net short-wave radiation, `Swnet`.

1. Add an entry for the new output variable to the *configs/MODEL\_OUTPUT\_LIST.TBL* file.

```
Swnet: 1 W/m2 DN 1 0 0 1 111 10 # Net shortwave radiation (W/m2)
```

Please see LIS' Users' Guide for a description of the *configs/MODEL\_OUTPUT\_LIST.TBL* file.

2. Add a new LIS\_MOC declaration for the new output variable to the *core/LIS\_histDataMod.F90* file.

```
public :: LIS_MOC_SWNET
```

3. Initialize the new LIS\_MOC entry in the *core/LIS\_histDataMod.F90* file.

```
integer :: LIS_MOC_SWNET = -9999
```

4. Mimic the logic in the *core/LIS\_histDataMod.F90* file to read the output configuration file (*configs/MODEL\_OUTPUT\_LIST.TBL*, referred to as *modelSpecConfig*) and to call the *register\_dataEntry* subroutine.

```

call ESMF_ConfigFindLabel(modelSpecConfig,"Swnet:",rc=rc)
call get_moc_attributes(modelSpecConfig, LIS_histData(n)%head_lsm_list, &
    "Swnet",&
    "surface_net_downward_shortwave_flux",&
    "net downward shortwave radiation",rc)
if ( rc == 1 ) then
    call register_dataEntry(LIS_MOC_LSM_COUNT,LIS_MOC_SWNET,&
        LIS_histData(n)%head_lsm_list,&
        n,nunits=1,ntiles=ntiles,unittypes=("/W/m2"/),&
        ndirs=2,dirtypes=("/UP","DN"/),&
        form=1,gribSFC=1,gribLvl=1,&
        model_patch=.true.)
endif

```

5. Mimic the logic in the *surfamodels/land/noah.3.3/noah33\_main.F90* file that “diagnoses” the output variables to add similar support into the new land surface model. The *LIS\_diagnoseSurfaceOutputVar* routine takes the given model output variable and stores it into LIS’ core output data structures, which we refer to as diagnosing the output variable.

```

call LIS_diagnoseSurfaceOutputVar(n, t,LIS_MOC_SWNET,value=soldn * &
    (1.0-noah33_struc(n)%noah(t)%albedo),vlevel=1,unit="W/m2",&
    direction="DN",surface_type=LIS_rc%lsm_index)

```

Note that in Noah 3.3, *SWnet* is derived from solar downward radiation (*soldn*) and albedo and that the derivation may be embedded into the call to diagnose the output variable.

Also note that an output variable may be represented in several units. For example, soil moisture may be represented in kg/m<sup>2</sup> or in m<sup>3</sup>/m<sup>3</sup>. Each units must be diagnosed with its own call to *LIS\_diagnoseSurfaceOutputVar*.

See the calls to diagnose *LIS\_MOC\_SOILMOIST* in *surfamodels/land/noah.3.3/noah33\_main.F90* for an example.

## 8 How to add a new forcing scheme in LIS

The boundary conditions describing the (upper) atmospheric fluxes are known as “forcings”. LIS makes use of model derived data as well as satellite and ground-based observational data as forcings. The land surface models are typically run using model derived data. The observational data are used to overwrite the model derived data, whenever they are available. In LIS, a scheme that includes a complete set of variables defined globally and defined in the ALMA forcing data convention can be used as a “baseforcing”. A scheme/product that is defined regionally or that includes only a subset of the ALMA forcing convention should be implemented as a supplemental forcing. Please note that in LIS 7, we no longer distinguish between a baseforcing and a supplemental forcing. Both are now referred to as a “metforcing”. When configuring a LIS run, you now specify, in the *lis.config* runtime configuration file, all forcing schemes/products as a list of desired metforcings to use. The first scheme/product in this list must be a “baseforcing” one.

The *plugins* directory contains the module *LIS.metforcing.pluginMod* that can be used to customize and define meteorological forcing schemes. This module provides the plugin routine *LIS.metforcing.plugin*.

*LIS.metforcing.pluginMod* provides registries to define functions to perform the following tasks.

- definition of native domain:  
Routines to define the native domain of the forcing data, read run-time specific parameters through a namelist, etc.
- retrieval of forcing data:  
Routines to retrieve the forcing data, and interpolate them.
- temporal interpolation:  
Routines to interpolate data temporally.
- finalize:  
Routines to cleanup

The following code segment shows how a metforcing scheme is included in LIS.

```
call registerinitmetforc(trim(LIS_gdasId)//char(0),init_gdas)
call registerretrievemetforc(trim(LIS_gdasId)//char(0),get_gdas)
call registertimeinterpmetforc(trim(LIS_gdasId)//char(0),timeinterp_gdas)
call registerfinalmetforc(trim(LIS_gdasId)//char(0),finalize_gdas)
```

Similar to the case in *LIS.lsm.pluginMod*, the indices used in the registries need to be the same for a particular scheme. The *LIS\_gdasId* is defined in the file *LIS.pluginIndices.F90*.

The input forcing has to be spatially and temporally interpolated to the LIS grid and the timestep used for LSM simulations. For computational performance considerations, spatial interpolation is an expensive operation, primarily because of the computation of interpolation weights. As a result, spatial interpolation is broken up into two steps: (1) computation of interpolation weights and (2) actual spatial interpolation.

The `init_gdas` routine performs two main functions: (1) to allocate the required memory structures and read runtime configurable options, and (2) to setup the interpolation weights required for interpolating the input forcing to the LIS grid.

The `get_gdas` routine reads the input forcing data based on the model clock time and interpolates it to the LIS model grid, using the interpolation weights defined in the `init_gdas`. A number of generic interpolation algorithms (bilinear, conservative, and neighbor) are provided in the `src/core` directory.

The `timeinterp_gdas` routine temporally disaggregates the spatially interpolated forcing data to the model timestep. This step includes the interpolation of forcing data between two or three forcing data intervals. The disaggregation is typically a weighted average. For downward shortwave radiation, a zenith angle-based disaggregation is typically performed.

Finally the `finalize_gdas` specifies the cleanup or deallocation of allocated memory structures specific to GDAS forcing.

## 8.1 How to add an additional forcing variable in LIS

LIS provides support for managing many common meteorological forcing fields. The `configs/forcing_variables.txt` file lists all the forcing fields that LIS supports. Should a new meteorological forcing scheme introduce a field that is not listed in the `configs/forcing_variables.txt` file, then additional modifications to the LIS code are necessary to complete the implementation of the new forcing scheme. Let's consider adding incident shortwave radiation `SWdown`.

1. Add an entry for the new forcing field to the `configs/forcing_variables.txt` file.

```
SWdown: 1 1 W/m2 # Incident shortwave radiation (total)
```

2. Add an entry for the new forcing field to the `configs/MODEL_OUTPUT_LIST.TBL` file.

```
SWdown_f: 1 W/m2 DN 1 0 0 1 204 10 # Surface incident shortwave radiation
```

3. Add a new LIS\_MOC declaration for the new forcing field to the `core/LIS_histDataMod.F90` file.



```
public :: LIS_MOC_SWDOWNFORC
```

4. Initialize the new LIS\_MOC entry in the *core/LIS\_histDataMod.F90* file.

```
integer :: LIS_MOC_SWDOWNFORC = -9999
```

5. Mimic the logic in the *core/LIS\_histDataMod.F90* file to read the output configuration file (*configs/MODEL-OUTPUT-LIST.TBL*, referred to as *modelSpecConfig*) and to call the *register\_dataEntry* subroutine.

```
call ESMF_ConfigFindLabel(modelSpecConfig,"SWdown_f:",rc=rc)
call get_moc_attributes(modelSpecConfig, LIS_histData(n)%head_lsm_list, &
  "SWdown_f",&
  "surface_downwelling_shortwave_flux_in_air",&
  "surface downward shortwave radiation",rc)
if ( rc == 1 ) then
  call register_dataEntry(LIS_MOC_LSM_COUNT,LIS_MOC_SWDOWNFORC,&
    LIS_histData(n)%head_lsm_list,&
    n,1,ntiles,(/"W/m2"/),2,(/"UP", "DN"/),1,1,1,&
    model_patch=.true.)
endif
```

6. Add a new LIS\_FORC declaration for the new forcing field to the *core/LIS\_FORC\_AttributesMod.F90* file.

```
public :: LIS_FORC_SWdown

type(forc_attrib_type) :: LIS_FORC_SWdown
```

7. Mimic the logic in the *core/LIS\_metforcingMod.F90* file to read the forcing configuration file (*configs/forcing\_variables.txt*, referred to as *forcConfig*), to call the *add\_forcing\_fields* subroutine, and to process the variable for output in the *diagnoseForcingOutput* subroutine.

```
call ESMF_ConfigFindLabel(forcConfig,"SWdown:",rc=status)
call get_forcingvar_attributes(forcConfig,LIS_FORC_SWdown,&
  "Incident Shortwave Radiation", tnvvars,status)
```

and

```

call add_forcing_fields(n,LIS_FORC_State(n),&
    LIS_FORC_Base_State(n,:),LIS_forc_SWdown)

```

and

```

if(LIS_FORC_SWdown%selectOpt.eq.1) then
  do k=1,LIS_FORC_SWdown%vlevels
    call ESMF_StateGet(LIS_FORC_State(n),trim(LIS_FORC_SWdown%varname(k)),&
        swdField,rc=status)
    call LIS_verify(status,&
        'error in ESMF_StateGet:SWdown in diagnoseForcingOutput')

    call ESMF_FieldGet(swdField,localDE=0, farrayPtr=swd,rc=status)
    call LIS_verify(status,&
        'error in ESMF_FieldGet:SWdown in diagnoseForcingOutput')

    do t=1,LIS_rc%ntiles(n)
      call LIS_diagnoseSurfaceOutputVar(n,t,LIS_MOC_SWDOWNFORC,value=&
          swd(t),vlevel=k,unit="W/m2",direction="DN",&
          valid_min = 0.0, valid_max=1360.0)
    enddo
  enddo
endif

```

## 9 How to add a new domain

STUB

## 10 How to add a new parameters

STUB

## 11 How to add a new irrigation scheme

STUB

## 12 How to add a new routing scheme

STUB

DRAFT

### 13 Customizing LIS for data assimilation

The emphasis of land surface data assimilation is to ingest remotely-sensed observations such as temperature, soil moisture, and snow to adjust the model representation which is most consistent with the observations. The data assimilation plugins in LIS are designed to support the use and implementation of different sequential algorithms in land surface model simulations.

The generic data assimilation plugin in LIS is enabled by the combination of a number of abstractions. There are many different data assimilation algorithms (direct insertion (DI), extended kalman filter (EKF), etc.) that can be employed. The chosen algorithm is used to update the relevant state variable(s) of the land surface model being employed. Finally, the observational data used in assimilation can be obtained from many different sources. Figure 4 shows the interactions of these three abstractions. LIS core enables the integrated use of these abstractions through explicitly defined interfaces. All data exchanges between the data assimilation components are enabled using the constructs provided by the Earth System Modeling Framework (ESMF; [4]). ESMF provides a standardized, self-describing format for data exchange between model components through the *ESMF\_State* datatype. The three abstractions shown in Figure 4 exchange information with each other using *ESMF\_State* objects.

The sequential data assimilation techniques typically involve updating the estimate of the system state at each observation time, based on the measurements up to this time. The overall process can be represented using a number of equations, as described in this section. Using the notation used in [8], the nonlinear land surface is represented in the generic form

$$\mathbf{x}_{k+1} = \mathbf{f}_k(\mathbf{x}_k) + \mathbf{w}_k \quad (1)$$

where  $\mathbf{x}_k$  represents the state vector at time  $k$ ,  $\mathbf{f}(\cdot)$  is the nonlinear operator, and  $\mathbf{w}_k$  represents the uncertainties due to errors in the model formulation and boundary conditions. The observations at time  $k$  denoted by  $\mathbf{y}_k$  is connected to the system states by the equation

$$\mathbf{y}_k = \mathbf{H}_k(\mathbf{x}_k) + \mathbf{v}_k \quad (2)$$

where the operator  $\mathbf{H}_k$  translates the system states to the measurement variables. Measurement errors are represented in the term  $\mathbf{v}_k$ . The noises in  $\mathbf{w}_k$  and  $\mathbf{v}_k$  are typically assumed to be independent random vectors with mean zero and covariances  $\mathbf{Q}_k$  and  $\mathbf{R}_k$ , respectively. The difference between the predicted observation vector and the measurement vector ( $\mathbf{y}_k - \mathbf{H}_k(\mathbf{x}_k)$ ) known as the 'innovations vector' is used to make a correction to the system states to generate an improved state estimate  $\mathbf{x}_{k+1}$ , known as the analysis, represented by:

$$\mathbf{x}_{k+1} = \mathbf{x}_k + \mathbf{K}(\mathbf{y}_k - \mathbf{H}_k(\mathbf{x}_k) + \mathbf{v}_k) \quad (3)$$

where  $\mathbf{K}$  represents the "gain matrix", which is chosen to ensure that analysis states converge to the true states of the system over time. The model is

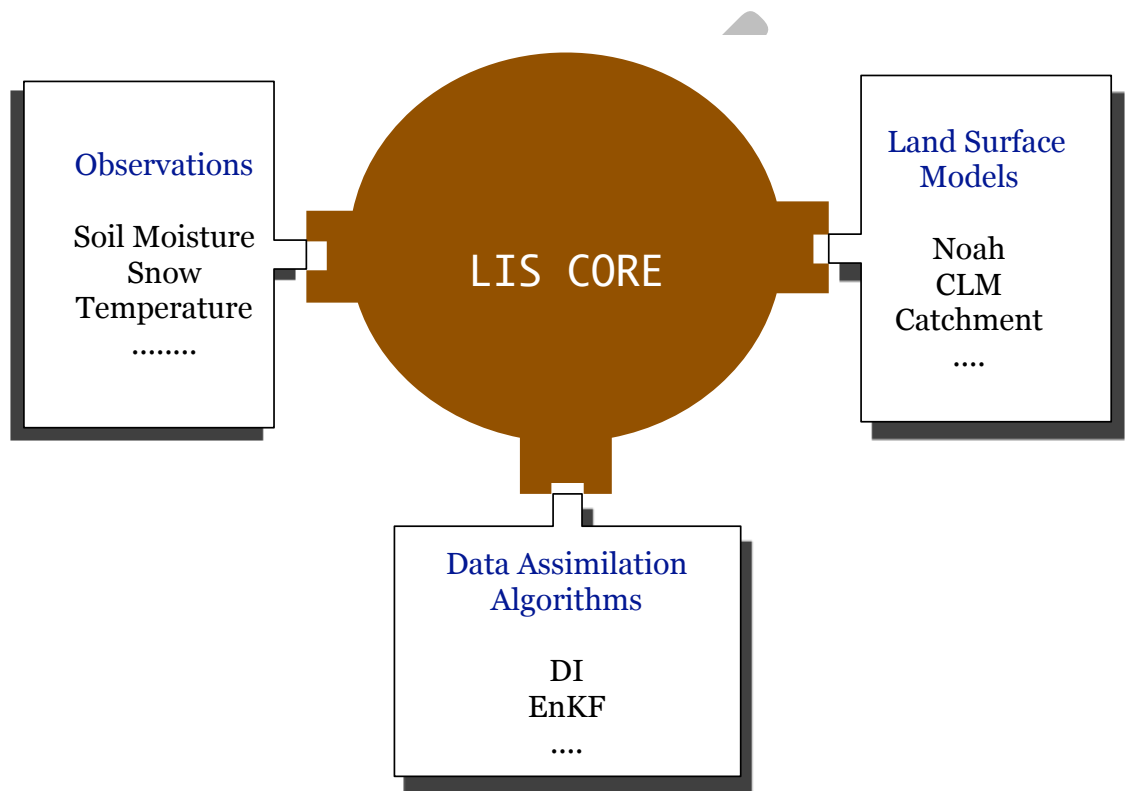


Figure 4: Data assimilation abstractions and their interactions in LIS

then evolved forward again from the analysis states to the next time where an observation is available and the process is repeated.

In order to define a custom data assimilation instance, a number of routines need to be specified in three different registries: (1) `LIS_dataassim_plugin` in *LIS\_dataassim\_pluginMod* that specifies the algorithm for data assimilation, (2) `LIS_DAobs_plugin` in *LIS\_DAobs\_pluginMod* that specifies the observation for data assimilation and (3) `LIS_lsmda_plugin` in *LIS\_lsmda\_pluginMod* that specifies the LSM related interfaces for data assimilation.

*LIS\_dataassim\_plugin* defines the following registries:

- **Init:**  
Defines routines for initializing memory structures and other initializations.
- **Assimilate/Update:**  
Method that provides the assimilation/update algorithm.
- **Output:**  
Method to write data assimilation diagnostics to a file
- **Finalize:**  
Method to cleanup allocated memory structures

These methods are registered using a single index for the assimilation algorithm that corresponds to the implementation.

The data assimilation algorithm implementations interact with the land surface models during the process of modifying and updating the state variables. The interaction is dependent on the land surface model and the state variable being updated. To facilitate this interaction, LIS provides a number of plugin interfaces in the *LIS\_lsmda\_pluginMod*. These interfaces are abstractions of the querying and updating operations needed to enable interaction with land surface models. Each land surface model used for data assimilation needs to extend these querying and updating interfaces, in addition to the interfaces pertaining to the basic operation of a land surface model described in section 7. A list of the required interfaces for each LSM are listed below.

- **get state variables method** to package the list of prognostic variables into an ESMF State.
- **set state variables method** to translate the given ESMF state and update the prognostic state variables.
- **QC LSM state method** to QC a given ESMF state (check bounds, physical consistency, etc)
- **define “obspred” method** to that defines the “obspred”, which is the model’s prediction of what the observations should be.
- **Scale LSM state method** to scale the LSM variables, if needed, so that the matrices used in an algorithm such as EnKF are well formed.

- descale LSM state opposite of the scaling method, to convert variables back to the original space.
- update LSM state This routine specifies how the analysis increments are to be applied. The routine provides flexibility in applying the increments to the selective list of variables.

These methods are registered using two indices. 1. index for the land surface model and 2. “Assimilation set”, which refers to a combination of observation and the variables being updated. For example, AMSR-E soil moisture observation to update Noah LSM variables, AMSR-E soil moisture observations to update Catchment LSM variables and MODIS snowcover observations to update Noah LSM variables constitute different assimilation sets.

Another generalization associated with the data assimilation operations is related to the handling of the observational data. The generic plugins implemented in LIS for this are designed similar to the handling of other (parameter, forcing) datasets.

The method *LIS\_DAobs\_plugin* defined in *LIS\_DAobs\_pluginMod* defines the registries for the functions related to observation handling. *LIS\_DAobs\_plugin* defines the following registries:

- Setup:  
Defines routines for initializing memory structures and other initializations.
- Reading method:  
Method that reads the observation data and packages it into an ESMF state
- Get number of selected observations:  
Returns the number of selected observations to be used for a single grid point.

These methods are registered using a single index for the assimilation set that corresponds to the method.

## 14 “Use only what you need”

A key advantage of the use of function tables for simulating polymorphism is the ability to use only the components that are needed. The “plug and play” of different components allows LIS to remain flexible, rather than evolve into a monolithic software when new components and features are added. This section describes how to compile and use only the needed components.

### 14.1 Defining source directories for compilation

A file called *Filepath* in the *src/make* directory specifies all the source files that will be included during compilation. A sample *Filepath* is shown below.

```
../core
../plugins
../domains/latlon
../domains/gaussian
../domains/polar
../domains/lambert
../domains/merc
../domains/catchment
../domains/gaussian
../domains/UTM
../domains/hrap
../runmodes/retrospective
../runmodes/wrf_cpl_mode
../runmodes/smoothDA
../params/gfrac/NESDISWeekly
../params/gfrac/SPORTDaily
../params/lai/MODIS_RT
../interp
../metforcing/templateMetForc
../metforcing/gdas
../metforcing/geos
../metforcing/geos5fcst
../metforcing/ecmwfreanal
../metforcing/ecmwf
../metforcing/gswp2
../metforcing/gswp1
../metforcing/princeton
../metforcing/rhoneAGG
../metforcing/gldas
../metforcing/gfs
../metforcing/merra-land
../metforcing/PILDAS
../metforcing/nldas1
```



../metforcing/nldas2  
../metforcing/stg2  
../metforcing/stg4  
../metforcing/rdhm356  
../metforcing/cmap  
../metforcing/agrrad  
../metforcing/agrradps  
../metforcing/3B42RT  
../metforcing/3B42V6  
../metforcing/3B42V7  
../metforcing/cmorph  
../metforcing/ceop  
../metforcing/scan  
../metforcing/narr  
../metforcing/gdasLSWG  
../metforcing/Bondville  
../metforcing/RFE2Daily  
../metforcing/snotel  
../metforcing/coop  
../metforcing/vicforcing.4.1.2  
../metforcing/RFE2gdas  
../metforcing/PALSmtdata  
../metforcing/pet\_usgs  
../metforcing/nam242  
../metforcing/WRFout  
../surfacemodels/land/template  
../surfacemodels/land/noah.2.7.1  
../surfacemodels/land/noah.2.7.1/da\_snodep  
../surfacemodels/land/noah.2.7.1/routing\_nldas  
../surfacemodels/land/noah.3.2  
../surfacemodels/land/noah.3.3  
../surfacemodels/land/noah.3.3/cpl\_wrf\_noesmf  
../surfacemodels/land/noah.3.3/da\_snow  
../surfacemodels/land/noah.3.3/da\_snodep  
../surfacemodels/land/noah.3.3/da\_soilm  
../surfacemodels/land/noah.3.3/routing  
../surfacemodels/land/noah.3.3/pe  
../surfacemodels/land/noah.3.3/pe/obspred/ARMS  
../surfacemodels/land/noah.3.3/pe/obspred/LPRM\_AMSREsm  
../surfacemodels/land/noah.3.3/pe/obspred/USDA\_ARSsm  
../surfacemodels/land/noah.3.3/pe/obspred/FLUXNET  
../surfacemodels/land/noah.3.3/sfc\_crtm/  
../surfacemodels/land/noah.3.3/sfc\_cmem3/  
../surfacemodels/land/noah.3.3/sfc\_tauomega/  
../surfacemodels/land/noah.3.3/irrigation  
../surfacemodels/land/clm2

```
../surfacemodels/land/clm2/main
../surfacemodels/land/clm2/biogeophys
../surfacemodels/land/clm2/ecosysdyn
../surfacemodels/land/clm2/cpl_wrf_noesmf
../surfacemodels/land/clm2/csm_share
../surfacemodels/land/clm2/da_lst
../surfacemodels/land/clm2/da_snow
../surfacemodels/land/clm2/da_soilm
../surfacemodels/land/clsm.f2.5
../surfacemodels/land/clsm.f2.5/routing_nldas
../surfacemodels/land/clsm.f2.5/da_soilm
../surfacemodels/land/clsm.f2.5/da_snow
../surfacemodels/land/clsm.f2.5/da_tws
../surfacemodels/land/clsm.f2.5/irrigation
../surfacemodels/land/mosaic
../surfacemodels/land/mosaic/da_soilm
../surfacemodels/land/mosaic/sfc_cmemb3
../surfacemodels/land/hyssib
../surfacemodels/land/cable/physics
../surfacemodels/land/cable/cpl_wrf_noesmf
../surfacemodels/land/geowrsi.2
../surfacemodels/land/vic.4.1.2.1
../surfacemodels/land/vic.4.1.2.1/physics
../surfacemodels/land/rdhm.3.5.6
../surfacemodels/land/rdhm.3.5.6/sac
../surfacemodels/land/rdhm.3.5.6/frz
../surfacemodels/land/rdhm.3.5.6/snow17
../surfacemodels/land/rdhm.3.5.6/sachtet
../surfacemodels/openwater/template/
../routing/NLDAS_router
../routing/HYMAP_router
../dataassim/perturb/gmaopert
../dataassim/algorithm/di
../dataassim/algorithm/enkf
../dataassim/algorithm/enksgrace
../dataassim/biasEstimation/gmaoBE
../dataassim/obs/ANSA_SCF
../dataassim/obs/MODISSca
../dataassim/obs/NASA_AMSREsm
../dataassim/obs/LPRM_AMSREsm
../dataassim/obs/ECV_sm
../dataassim/obs/WindSat_sm
../dataassim/obs/PMW_snow
../dataassim/obs/GRACE
../dataassim/obs/RT_SMOPSSm
../irrigation/sprinkler
```

## 14.2 Defining components while building the executable

As described in the previous sections, the specific instances of each customizable interface in LIS are defined in different registries. Once the user specifies the components to be used in these interfaces, the *Filepath* directory can be modified to include only these components. For example, if a user is interested in running only one land surface model (say Noah 3.3) and does not want to keep and compile other land surface models, the *Filepath* can be modified to indicate that only Noah 3.3 needs to be compiled as follows (Note that the template, hysibb, clm2, mosaic, clsm.f2.5, noah.2.7.1, noah.3.2, geowrsi.2, vic.4.1.2.1, and rdhm.3.5.6 directories have been removed from the above *Filepath*):

```
../core
../plugins
../domains/latlon
../domains/gaussian
../domains/polar
../domains/lambert
../domains/merc
../domains/catchment
../domains/gaussian
../domains/UTM
../domains/hrap
../runmodes/retrospective
../runmodes/wrf_cpl_mode
../runmodes/smoothenDA
../params/gfrac/NESDISWeekly
../params/gfrac/SPORTDaily
../params/lai/MODIS_RT
../interp
../metforcing/templateMetForc
../metforcing/gdas
../metforcing/geos
../metforcing/geos5fcst
../metforcing/ecmwfreanal
../metforcing/ecmwf
../metforcing/gswp2
../metforcing/gswp1
../metforcing/princeton
../metforcing/rhoneAGG
../metforcing/gldas
../metforcing/gfs
../metforcing/merra-land
../metforcing/PILDAS
../metforcing/nldas1
../metforcing/nldas2
../metforcing/stg2
```

../metforcing/stg4  
../metforcing/rdhm356  
../metforcing/cmap  
../metforcing/agrrad  
../metforcing/agrradps  
../metforcing/3B42RT  
../metforcing/3B42V6  
../metforcing/3B42V7  
../metforcing/cmorph  
../metforcing/ceop  
../metforcing/scan  
../metforcing/narr  
../metforcing/gdasLSWG  
../metforcing/Bondville  
../metforcing/RFE2Daily  
../metforcing/snotel  
../metforcing/coop  
../metforcing/vicforcing.4.1.2  
../metforcing/RFE2gdas  
../metforcing/PALSmtdata  
../metforcing/pet\_usgs  
../metforcing/nam242  
../metforcing/WRFout  
../surfacemodels/land/noah.3.3  
../surfacemodels/land/noah.3.3/cpl\_wrf\_noesmf  
../surfacemodels/land/noah.3.3/da\_snow  
../surfacemodels/land/noah.3.3/da\_snodep  
../surfacemodels/land/noah.3.3/da\_soilm  
../surfacemodels/land/noah.3.3/routing  
../surfacemodels/land/noah.3.3/pe  
../surfacemodels/land/noah.3.3/pe/obspred/ARMS  
../surfacemodels/land/noah.3.3/pe/obspred/LPRM\_AMSREsm  
../surfacemodels/land/noah.3.3/pe/obspred/USDA\_ARSsm  
../surfacemodels/land/noah.3.3/pe/obspred/FLUXNET  
../surfacemodels/land/noah.3.3/sfc\_crtm/  
../surfacemodels/land/noah.3.3/sfc\_cmem3/  
../surfacemodels/land/noah.3.3/sfc\_tauomega/  
../surfacemodels/land/noah.3.3/irrigation  
../surfacemodels/openwater/template/  
../routing/NLDAS\_router  
../routing/HYMAP\_router  
../dataassim/perturb/gmaoport  
../dataassim/algorithm/di  
../dataassim/algorithm/enkf  
../dataassim/algorithm/enksgrace  
../dataassim/biasEstimation/gmaoBE

```

../dataassim/obs/ANSA_SCF
../dataassim/obs/MODISsca
../dataassim/obs/NASA_AMSREsm
../dataassim/obs/LPRM_AMSREsm
../dataassim/obs/ECV_sm
../dataassim/obs/WindSat_sm
../dataassim/obs/PMW_snow
../dataassim/obs/GRACE
../dataassim/obs/RT_SMOPSSm
../irrigation/sprinkler

```

Correspondingly, the *LIS\_lsm\_plugin* method in *src/plugins/LIS\_lsm\_pluginMod.F90* needs to be defined as (excluding other land models from the registry):

```

subroutine LIS_lsm_plugin
  use LIS_pluginIndices
  use noah33_lsmMod, only : noah33_lsm_ini

  external noah33_main
  external noah33_setup
  external noah33_readrst
  external noah33_dynsetup
  external noah33_f2t
  external noah33_writerst
  external noah33_finalize

  call registerlsmnit(trim(LIS_noah33Id)//char(0),noah33_lsm_ini)
  call registerlsmsetup(trim(LIS_noah33Id)//char(0),noah33_setup)
  call registerlsmf2t(trim(LIS_noah33Id)//"+"&
    //trim(LIS_retroId)//char(0),noah33_f2t)
  call registerlsmrun(trim(LIS_noah33Id)//char(0),noah33_main)
  call registerlsmrestart(trim(LIS_noah33Id)//char(0),noah33_readrst)
  call registerlsmdynsetup(trim(LIS_noah33Id)//char(0),noah33_dynsetup)
  call registerlsmwrst(trim(LIS_noah33Id)//char(0),noah33_writerst)
  call registerlsmfinalize(trim(LIS_noah33Id)//char(0),noah33_finalize)
end subroutine LIS_lsm_plugin

```

Note that when include or excluding specific land surface models, you must make similar changes to these files: *LIS\_lsmcpl\_pluginMod.F90*, *LIS\_lsmda\_pluginMod.F90*, *LIS\_lsmirrigation\_pluginMod.F90*, *LIS\_lsmoptue\_pluginMod.F90*, *LIS\_lsmrouting\_pluginMod.F90*, and *LIS\_lsmrtm\_pluginMod.F90*.

Similarly, different combinations of using the components can be implemented defining the registries appropriately and specifying the corresponding source files in the *Filepath* file.

## References

- [1] Community climate system model, software developers guide. [http://www.cesm.ucar.edu/csm/working\\_groups/Software/dev\\_guide/dev\\_guide/](http://www.cesm.ucar.edu/csm/working_groups/Software/dev_guide/dev_guide/).
- [2] Protex documentation system. <http://gmao.gsfc.nasa.gov/software/protex>.
- [3] ALMA. <http://www.lmd.jussieu.fr/~polcher/ALMA/>.
- [4] ESMF. <http://www.earthsystemmodeling.org/>.
- [5] S.V. Kumar, C.D. Peters-Lidard, J.L. Eastman, and W.-K. Tao. An integrated high resolution hydrometeorological modeling testbed using lis and wrf. *Environmental Modeling and Software*, 23:169–181, 2007.
- [6] S.V. Kumar, C.D. Peters-Lidard, Y. Tian, P.R. Houser, J. Geiger, S. Olden, L. Lighty, B. Doty, P. Dirmeyer, J. Adams, K. Mitchell, E.F. Wood, and J. Sheffield. Land information system - an interoperable framework for high resolution land surface modeling. *Environmental Modeling Software*, 3(3):157–165, 2006.
- [7] S.V. Kumar, R.H. Reichle, C.D. Peters-Lidard, R.D. Koster, X. Zhan, W.T. Crow, J.B. Eylander, and P.R. Houser. A land surface data assimilation framework using that land information system: Description and applicatins. *Advances in Water Resources*, page in print, 2008.
- [8] R. H. Reichle, J. P. Walker, R. D. Koster, and P. R. Houser. Extended versus ensemble kalman filtering for land data assimilation. *Journal of Hydrometeorology*, 3(6):728–740, 2002.